



CT - 465

SPECIALTY CLEANER

DI-ELECTRIC SOLVENT

FEATURES

- High power spray dissolves grease and removes grime
- 36,200 Volt Dielectric Strength
- No petroleum distillates
- No CFC's; Ozone Safe
- Fast Drying
- Safe on energized electrical equipment

PROPERTIES

Appearance: Transparent, colorless liquid with mild sweet odor.

Boiling point: 154 °F

Specific gravity: 1.419 gr/cc

Total VOC: 96 %

Solubility in water: Insoluble

Flash point: None

Storage stability: Keep away from direct sun light and open flames


Flammability: Non-flammable aerosol

Packaging: 12x18oz. Net Wt. Cans/Case

DI-ELECTRIC SOLVENT is a residual free, super fast drying, high power spray that dissolves grease and rinses away dirt and grime without damaging mechanical parts. This non-flammable solvent features a 36,200 Volt dielectric strength, making it the only degreaser that is safe for use on generators, motors, relays, and control panels even while equipment is in operation. DI-ELECTRIC SOLVENT contains no CFC's, ozone depleting chemicals or petroleum distillates. It also contains an accepted replacement for 1,1,1-Trichloroethane under the EPA SNAP program. It is ideal for use in automotive parts, engines, heating and air conditioning equipment, power tools, food processing equipment, and much more.

To use, saturate part to be cleaned. Wipe or allow to air dry. Use brush and rinse off with a second application if needed. Product may damage paint so spot testing is recommended. Refer to the attached SDS for precautions. The information contained in this safety sheet is aimed at creating a guide for the selection and use of the product. However, we are not responsible for any use not recommended by ChemTron.

ChemTron
3911 SW 47th AVE
Davie, Florida 33314
Tel: (954) 584 - 4530
Fax: (954) 584 - 4531
www.chemtron.com

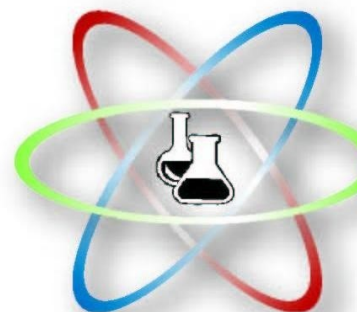

- Properties are typical and subject to usual manufacturing tolerances.

PROFESSIONAL ENGINEERING PRODUCTS