



CT - 377

PROTECTIVE COATING

# POLYCOTE 200 Water Repellent

## FEATURES

- Seals all type of metal and porous surfaces and leaves a protective barrier
- Excellent water and soil repellent
- Concentrated formula needs fewer applications
- Excellent adhesion to substrate forming a semi-permanent bond
- Safe to handle, easy to use
- Water base formula

## PROPERTIES

**Appearance:** Milky white emulsion with no particular odor

**Boiling point:** 212 °F

**Specific gravity:** 1.02 gr/cc

**Non volatiles:** 18 %

**Solubility in water:** Miscible

**Flash point:** Non Flammable

**Storage stability:** Keep container sealed away from heat and oxidizers

**pH of liquid:** 6-7


**Packaging:** 4 gallon cases  
5 gallon Pail  
15 gallon Drum

POLYCOTE 200 dries fast and will not affect the natural appearance of the treated surface and can be removed if necessary with a strong degreaser or a wax strippers. Before applying product, clean the target surface. POLYCOTE 200 can be applied undiluted or diluted up to 5 times with water; use a sprayer, brush, mop, sponge or roll into surface, microfiber cloth or roll is recommended. If required, several coats can be applied for greater repellency. Leave sufficient time to dry before recoating. POLYCOTE is ideal for vehicles of all types, however avoid applying on glass since it reduces visibility. Allow at least 1 hour for complete cure and drying of the coating.

Avoid contact with eyes and skin, if on eyes or skin, wash with soap and water before it dries. Keep out of children's reach.

Do not mix POLYCOTE 200 with other chemicals. Refer to the label and SDS for additional instructions and precautions. The information contained in this safety sheet is aimed at creating a guide for the selection and use of the product. However, we are not responsible for any use not recommended by ChemTron.

ChemTron  
3911 SW 47th AVE  
Davie, Florida 33314  
Tel: (954) 584 - 4530  
Fax: (954) 584 - 4531  
[www.chemtron.com](http://www.chemtron.com)

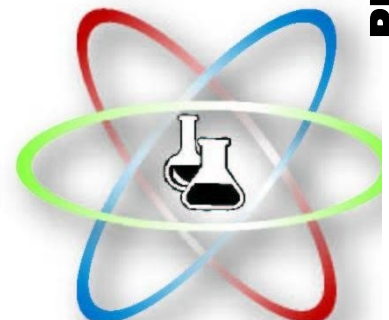

PROFESSIONAL ENGINEERING PRODUCTS

- Properties are typical and subject to usual manufacturing tolerances.